


Female Bulkhead Connector

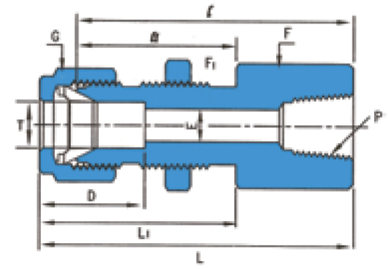

Fractional Range

Part No.	Tube O.D (T) inches	NPT (P*)	E Min	Width across flat			D	l	l1	L	L1	Panel Hole Drill Size	Panel Max Thickness
				F	F1	G							
				inches	inches	inches							
2FBH2	1/8	1/8	2.28	9/16	1/2	7/16	12.70	38.10	24.63	44.70	31.24	8.33	12.70
4FBH2	1/4	1/8	4.82	5/8	5/8	9/16	15.24	39.63	26.16	46.99	33.52	11.50	10.16
4FBH4	1/4	1/4	4.82	3/4	5/8	9/16	15.24	44.45	26.16	51.81	33.52	11.50	10.16
6FBH4	3/8	1/4	7.11	3/4	3/4	11/16	16.76	47.75	29.46	55.11	36.83	14.68	11.17
8FBH6	1/2	3/8	10.41	15/16	15/16	7/8	22.86	51.56	31.75	61.72	41.91	19.44	12.70
8FBH8	1/2	1/2	10.41	1 1/16	15/16	7/8	22.86	56.38	31.75	66.54	41.91	19.44	12.70
12FBH12	3/4	3/4	15.74	1 1/4	1 3/16	1 1/8	24.38	65.35	38.80	75.51	47.21	25.79	16.76

Metric Range

Part No.	Tube O.D (T) mm	NPT (P*)	E Min	Width across flat			D	l	l1	L	L1	Panel Hole Drill Size	Panel Max Thickness
				F	F1	G							
				mm	mm	mm							
6FBH2 - MM	6	1/8	4.8	15.8	15.8	14	15.3	39.50	27.7	46.90	35.00	11.5	10.2
6FBH4 - MM	6	1/4	4.8	19.0	16.0	14	15.3	44.40	26.2	51.80	33.60	11.5	10.2
8FBH4 - MM	8	1/4	6.3	19.0	17.4	16	16.2	46.35	28.4	53.85	35.55	13.1	11.2
12FBH8 - MM	12	1/2	9.5	27.0	24.0	22	22.8	56.40	31.8	66.50	41.90	19.5	12.7