


Male Connector

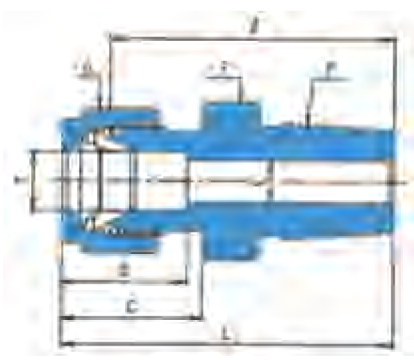

Metric Range: ISO Tapered Thread

Part No.	Tube O.D (T) mm	(R)PT (P*)	E Min	Width across flat		D	C	t	L
				F	G				
				mm	mm				
2MC2 - MM	2	1/8	1.7	12	12	12.9	15.3	23.9	30.5
3MC2 - MM	3	1/8	2.4	12	12	12.9	15.3	23.1	29.7
3MC4 - MM	3	1/4	2.4	14	12	12.9	15.3	29.0	35.6
4MC2 - MM	4	1/8	2.4	12	12	13.7	16.1	24.6	31.2
4MC4 - MM	4	1/4	2.4	14	12	13.7	16.1	29.7	36.3
6MC2 - MM	6	1/8	4.8	14	14	15.3	17.7	25.4	32.8
6MC4 - MM	6	1/4	4.8	14	14	15.3	17.7	30.2	37.6
6MC6 - MM	6	3/8	4.8	17	14	15.3	17.7	31.0	38.4
6MC8 - MM	6	1/2	4.8	22	14	15.3	17.7	36.6	44.0
8MC2 - MM	8	1/8	4.8	15	16	16.2	18.6	26.7	34.2
8MC4 - MM	8	1/4	6.4	15	16	16.2	18.6	31.2	38.7
8MC6 - MM	8	3/8	6.4	17	16	16.2	18.6	31.8	39.2
8MC8 - MM	8	1/2	6.4	22	16	16.2	18.6	37.3	44.8
10MC2 - MM	10	1/8	4.8	18	19	17.2	19.5	28.7	36.3
10MC4 - MM	10	1/4	7.1	18	19	17.2	19.5	33.3	40.9
10MC6 - MM	10	3/8	7.9	18	19	17.2	19.5	33.3	40.8
10MC8 - MM	10	1/2	7.9	22	19	17.2	19.5	38.1	45.7
12MC4 - MM	12	1/4	7.1	22	22	22.8	22.0	33.3	43.4
12MC6 - MM	12	3/8	9.5	22	22	22.8	22.0	33.3	43.4
12MC8 - MM	12	1/2	9.5	22	22	22.8	22.0	38.1	48.2
12MC12 - MM	12	3/4	9.5	27	22	22.8	22.0	38.9	49.0
15MC8 - MM	15	1/2	11.9	24	25	24.4	22.0	38.9	49.0
16MC4 - MM	16	1/4	7.1	24	25	24.4	22.0	34.0	44.1
16MC6 - MM	16	3/8	9.5	24	25	24.4	22.0	34.0	44.1
16MC8 - MM	16	1/2	11.9	24	25	24.4	22.0	38.9	29.0
16MC12 - MM	16	3/4	12.7	27	25	24.4	22.0	38.9	49.0
18MC8 - MM	18	1/2	11.9	27	30	24.4	22.0	40.4	50.5
18MC12 - MM	18	3/4	15.1	27	30	24.4	22.0	40.4	50.5
20MC8 - MM	20	1/2	11.9	30	32	26.0	22.0	42.2	52.3
20MC12 - MM	20	3/4	15.9	30	32	26.0	22.0	42.2	52.3
22MC12 - MM	22	3/4	15.9	30	32	26.0	22.0	42.2	52.3
22MC16 - MM	22	1	18.3	35	32	26.0	22.0	47.8	57.9
25MC12 - MM	25	3/4	15.9	35	38	31.3	26.5	45.2	57.5
25MC16 - MM	25	1	21.8	35	38	31.3	26.5	50.0	62.3